




## Dot Series Dot 6 Tag

### Model: Dot 6

#### 1. Introduction

The Dot Tag has the mini size in the field of industrial applications. It is ideal for tagging small items with limited space for asset management.

Furthermore, it can be embedded directly into non-metallic cavity. Or placed on metal surface. The installation is by glue.

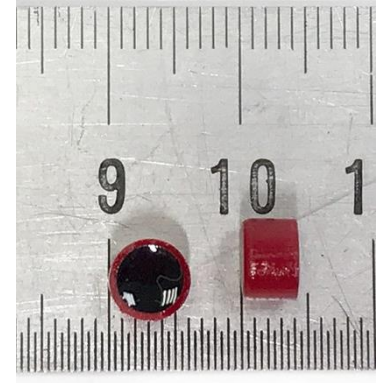

#### 2. Available IC

I.CODE series, Ucode 8, other upon request

#### 3. Data Sheet

Item	Specification
Operating Frequency	13.56 MHz & 860MHz-960MHz
Material	PET/GF + Epoxy
Storage Temperature	-40°C to +170°C(HF) ; -40°C to +200°C(UHF)
Operating Temperature	-40°C to +85°C
International Protection	IP67
Operating Distance	Depends on reader design
Dimension	6(D) x 4(T) mm
Options	